Drawing of water connection

As the “ ” from the picture,please make the connection according to the serial number v1,v2,etc.

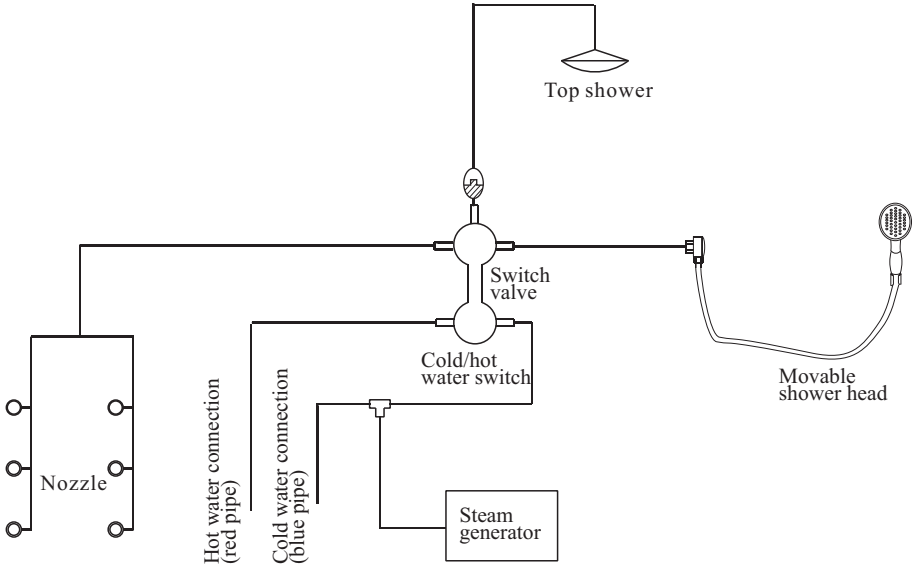

MESDA

WS-801L

PRODUCT MANUAL

★All we do our best for the particular and definitude of the products information making , but only for reference , please depend on the practise and reality in detail .
★Our company keep down the authority of amending the aspects and the spare parts , according as the scheme's or parameter's redressal
which was come out from technical renewal , sorry to will not offer any notice.
★our company reserve the final explanation and modify right for all the contents.

Do not dispose this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary.

Dera user,

Thank you very much for purchasing our sanitary ware. To enable you to use this product safely and effectively, please read this installation and operation manual carefully before use.

Notice

1. Please connect the water pipe before installed the products.
2. Please ensure that the product installed reliable electric leakage protection device, the power plug contains earthing conductor, and make sure it is reliable for earthing. Check the protect system of leakage protection each time before use.
3. Before turn on water pump, check if the water level over jets 10 to 20 mm or not, make sure regular usage of water pump, otherwise it will be destroy because of water leakage.
4. Do not turn on water pump, heat pump and air bubble pump without water.
5. People with Hypertension symptom, after drink or heart disease are not allowed to use this product. Children have a bath must under adult's guidance.
6. During using, please noticed that don't block the jets completely in case of water leakage by the air switch . Also keep this product clean and don't let it block with hair or mess.
7. During using, please firstly adjust the water temperature in case of being burned.
8. The outdoor spa is designed with ergonomic, rise and fall changes are dis tinctly, so pay more attention of slip.
9. Please shut down the system when not use.
10. Don't turn on all the water pump in the steamroom for long time.

Technical Parameter

Size: 1060x1060x2150mm
Voltage: 220V-240V 50Hz/60Hz
Hydraulic pressure : 0.1～0.2Mpa
Power of steam generator : 3000 W
light:AC12V,20W
OzoneAC12V,6W

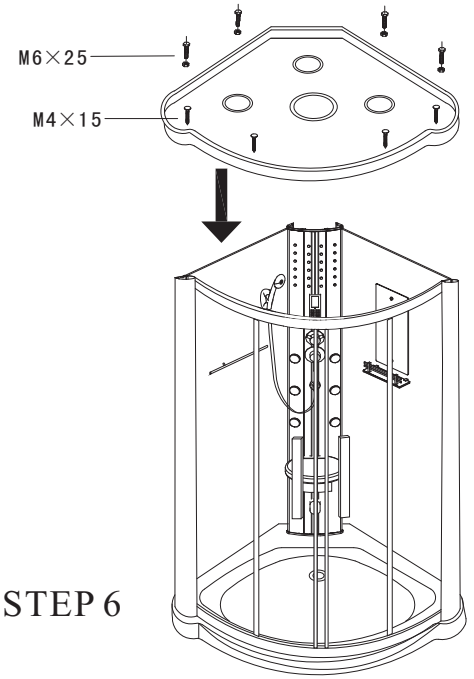

STEP 6

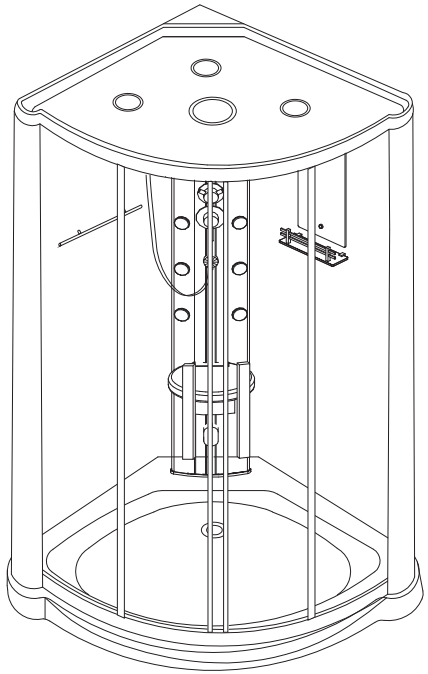

STEP 7

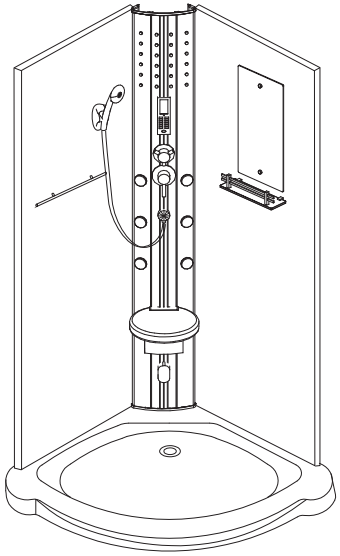

STEP 4

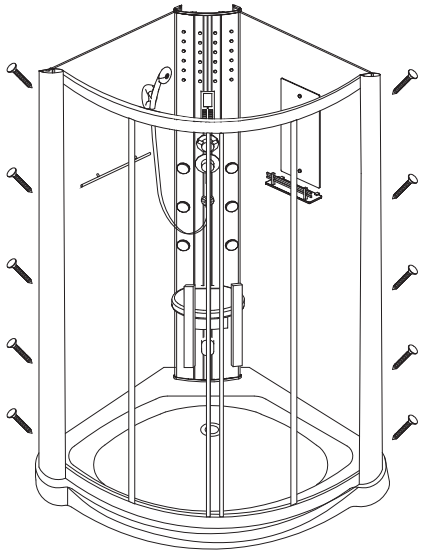

STEP 5

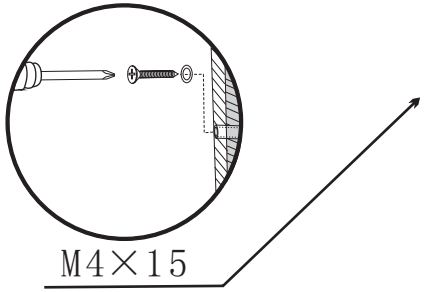

SANITARY WARE

CONSTRUCTION SKETCH

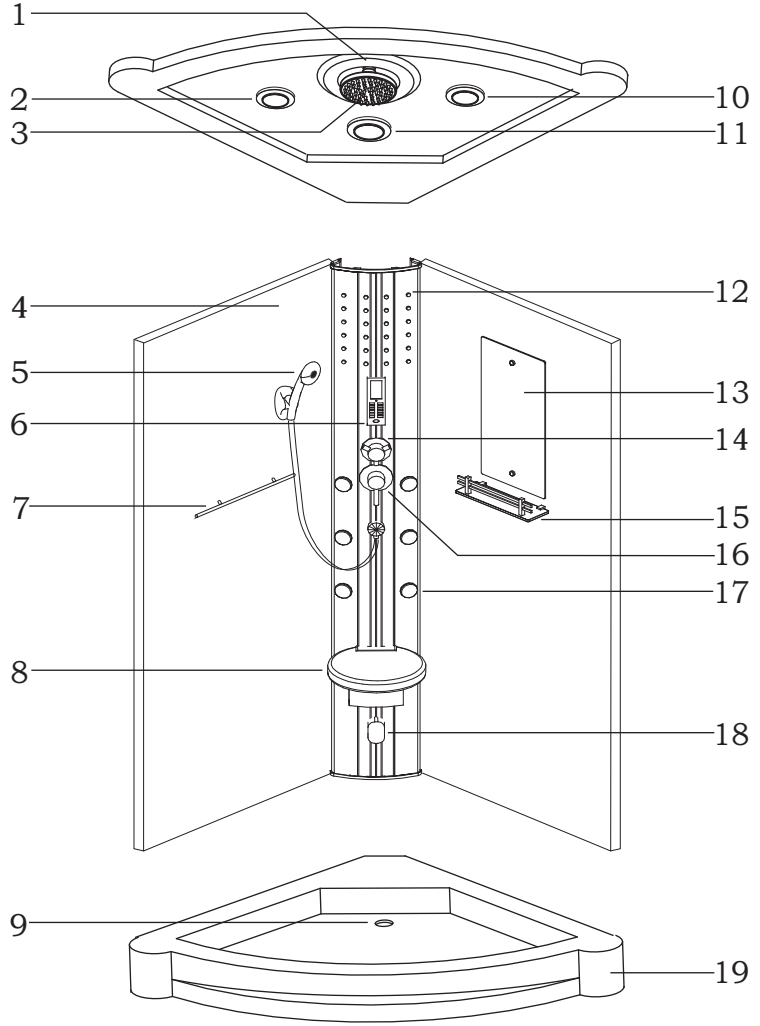

1、top light
2、speaker
3、top shower
4、room body
5、moveable shower
6、control panel
7、towel shelf
8、seat
9、drainage
10、exhaust fan
11、ozone
12、decorated light
13、mirror
14、shift switch
15、back light
16、cold/hot water switch
17、nozzle
18、steam out
19、bottom tray

INSTALLATION SKETCH

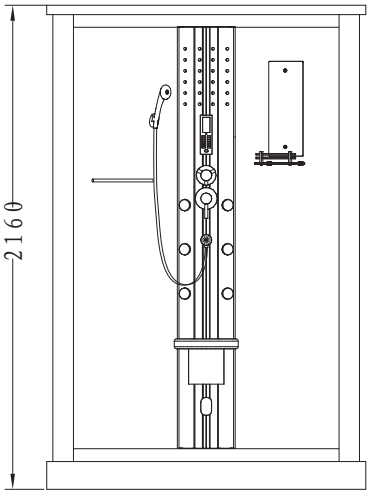

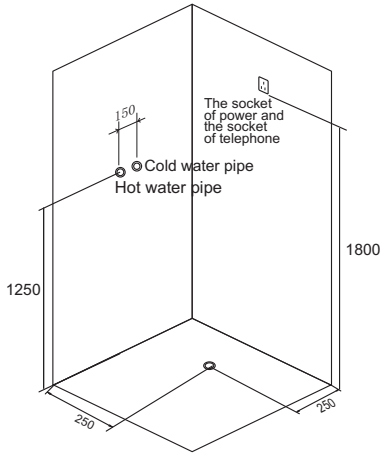

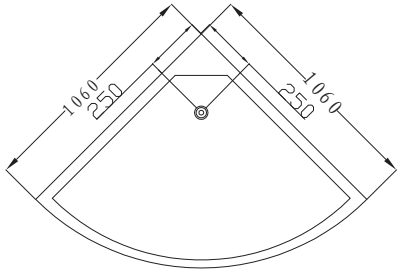

SIZE:1060X1060X2160mm

Other screws
M4x15 M4x25

Install the screw
M6x25



Active chain wheel of glass



ILLUSTRATION OF INSTALLATION

1.The products should be installed by technical guy who are got the certificate or those technical who are assign by dealers. The main power switch and electronic leakage device should be installed.

2.The plug of electronic should be installed above the steam generator and the length of electronic wire not less then 1800MM from the earth.

3.There are should be with main power switch for hot and cold water pipe of steam room and the water pipe should be connect to drainage water pipe.

4.Install the products according to the diagram of installation When fixed the place for the products.

INSTALLATION PROCESS

STEP 1



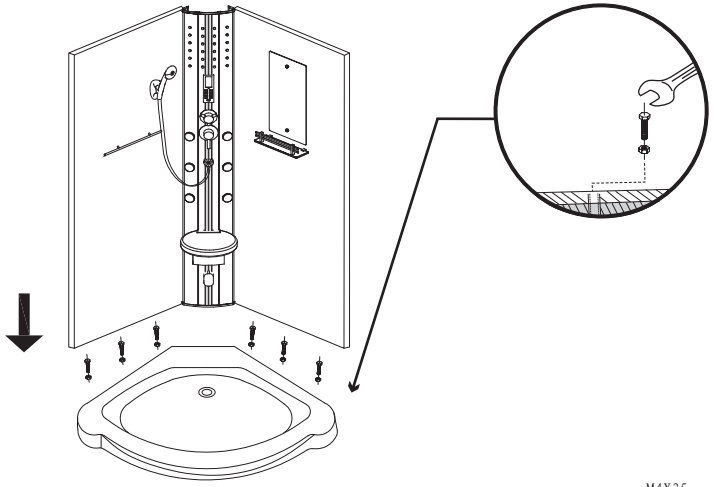

STEP 2



Chain wheel of glass door

STEP 3